





# Crossgrip TPO



Roof Walkway Matting  
*All weather safe access*

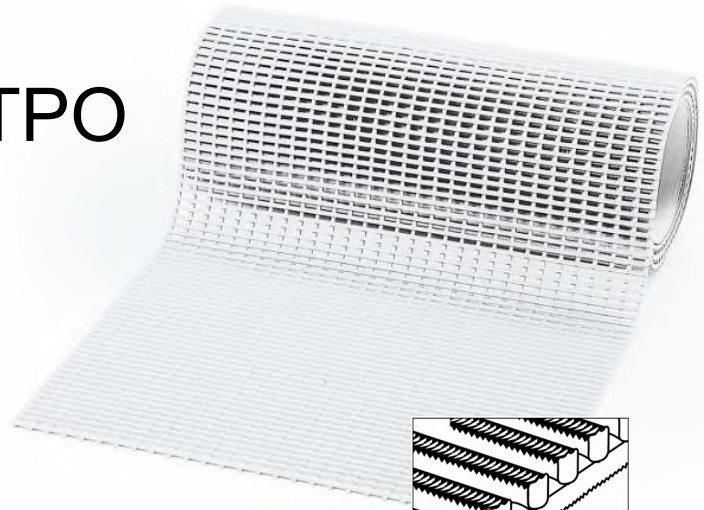

- *Compatible with TPO, EPDM, PVC and modified bitumen roofs.*
- *Permanent slip resistance*
- *UV resistant*
- *Protects roofing membranes from pedestrian traffic*
- *Open grid and self draining*
- *Stable in wind speeds up to 55mph - 89km/h\**
- *Supplied in 10m rolls 75cm width*
- *One piece welded construction*

*Crossgrip TPO is designed for use with TPO (thermoplastic polyolefin), EPDM (ethylene propylene diene monomer), PVC (polyvinyl chloride) and modified bitumen roofs. Designed for use on flat roofs, Crossgrip TPO's 12mm one piece welded open grid design offers permanent slip resistance, even in areas where water may pool.*

*Once installed, it remains stable in winds up to 55mph - 89km/h\*, however if winds exceed such speed the matting should be secured with connecting loops.*

\*Wind Tunnel tests at the University of Hertfordshire, School of Aerospace, Automotive & Design Engineering showed Crossgrip TPO when laid flat remained in position for wind speeds of 88mph (142 km/h).



*Supplied in 10m rolls 75cm width and white colour*



**Plastic Extruders Limited**  
Russell Gardens, Wickford, Essex, SS11 8DN England  
Tel: +44 (0)1268 571116 Fax: +44 (0)1268 560027  
email: sales@plastex.co.uk www.crossgrip.com

